

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number  
WO 03/061415 A1

(51) International Patent Classification<sup>7</sup>: A41D 25/02  
(21) International Application Number: PCT/IB03/00118  
(22) International Filing Date: 20 January 2003 (20.01.2003)  
(25) Filing Language: English  
(26) Publication Language: English  
(30) Priority Data:  
0108/02 23 January 2002 (23.01.2002) CH

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and  
(72) Inventor: JALLARD, Olivier [CH/CH]; Feldhofstrasse 4, CH-9523 Züberwangen (CH).

(74) Agent: FIAMMENGHI-DOMENIGHETTI, Delfina; Fiammenghi-Fiammenghi, Via San Gottardo 15, CH-6900 Lugano (CH).

Published:  
— with international search report

[Continued on next page]

(54) Title: DECORATIVE TIE WHICH CAN BE JOINED TO A SHIRT COLLAR

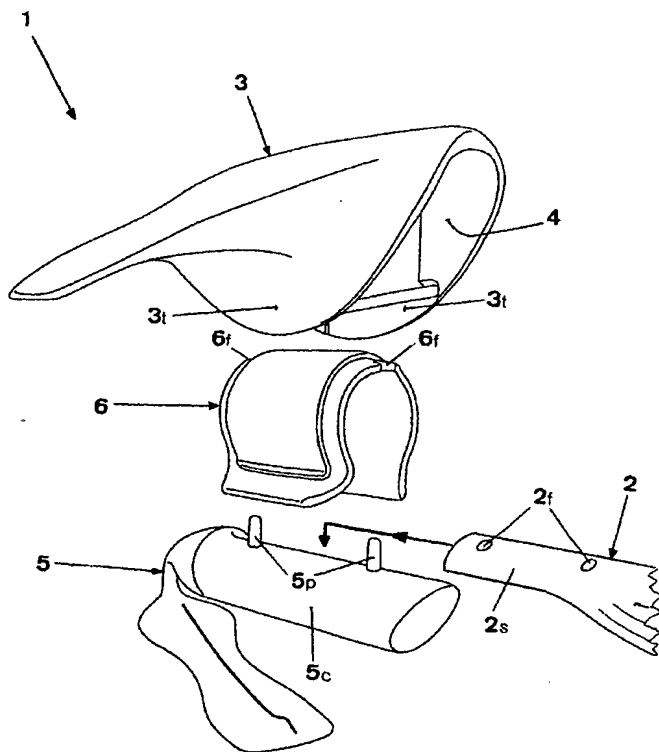

(57) **Abstract:** A tie (1) joined to a shirt collar is described, said tie being composed of a linearly extending strip (2) which is arranged between a shaped clasp cover-piece (3) provided with a vertical cavity (4) and a clasp (5) shaped in the manner of an overturned U and able to be contained partly inside the cavity (4) so as to fix inside it the top end (2s) of the said strip (2) between the clasp (5) and the cavity (4). In the tie in question the body (5c) of the clasp (5) is substantially cylindrical and has, emerging from it perpendicularly, two or more studs (5p) which pass through a corresponding number of holes (2f) formed on the top end (2s) of the strip (2), said studs (5p) projecting from the holes (2f) so as to penetrate at least partly into a corresponding number of openings (6f) formed on a clip-like sleeve (6) which is open on one side and shaped so as to contain in a complementary manner the clasp (5) supporting thereon the abovementioned top end (2s) of the strip (2) passed through by the studs (5p), adhering thereto elastically, and so as to be contained in a complementary manner, remaining fixed there, inside the cavity (4) of the clasp cover-piece (3).

WO 03/061415 A1